Distributed by:

JAMECO® ELECTRONICS

**www.Jameco.com ✦ 1-800-831-4242**

The content and copyrights of the attached material are the property of its owner.

**Jameco Part Number 77956**

1008-09 S T K S S
1 2 3 4 5 6

| | | | |
|---|---|---|---|
| 1 | NO. OF PINS | | 09, 15, 25, 37 |
| 2 | CONTACT TYPE | : | P-Male S-Female |
| 3 | SHELL PLATED | : | T - Tin shell |
| 4 | INSULATOR COLOR | : | B-blue K-black Y-yellow |
| 5 | MOUNTING TYPE | : | S-With jack screws & board lock<br>R-With UNC#4-40 insert & board lock separate with screws<br>O-Other options under requirements |
| 6 | CONTACT PLATED | : | S-Selective gold plated<br>G-Gold plated |

**FEMALE**

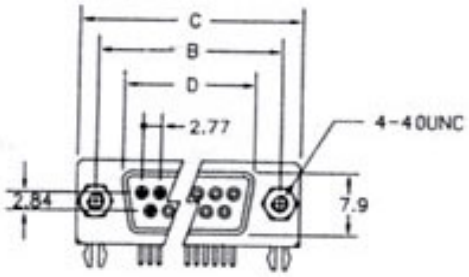


**MALE**

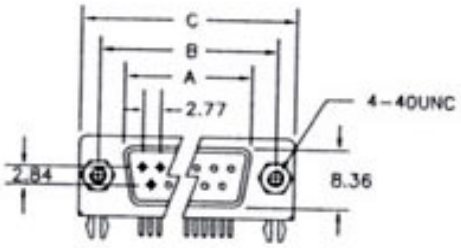


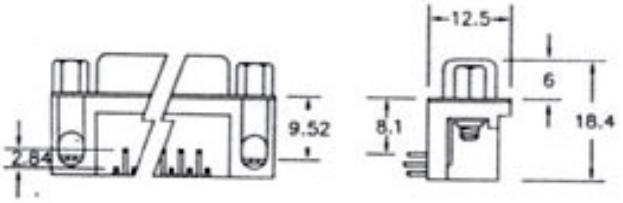


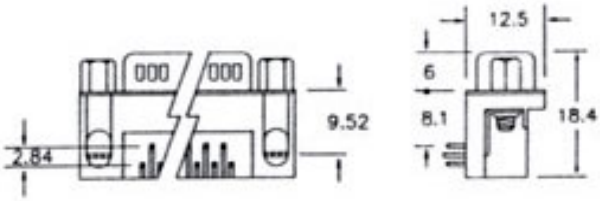


# D-SUB RIGHT ANGLE TYPE (7.2mm)

**Specifications:**

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin. at DC 500V
Current Rating: 5 AMP

**Dielectric Withstanding**

Voltage: AC 1000V For 1 minute
Operating Temperature: −55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-O)

**Dimension**

| Position | A | B | C | D |
|---|---|---|---|---|
| 9 | 16.92 | 24.99 | 30.81 | 16.33 |
| 15 | 25.25 | 33.32 | 39.14 | 24.66 |
| 19 | | 39.03 | 44.80 | 29.92 |
| 23 | | 44.36 | 50.30 | 35.18 |
| 25 | 38.96 | 47.04 | 53.04 | 38.38 |
| 37 | 55.42 | 63.50 | 69.32 | 54.84 |
| 50 | 52.86 | 61.11 | 66.90 | 52.34 |